

ehp

**ENVIRONMENTAL
HEALTH
PERSPECTIVES**

ehponline.org

**Pit Latrines and Their Impacts on Groundwater Quality:
A Systematic Review**

Jay P. Graham and Matthew L. Polizzotto

<http://dx.doi.org/10.1289/ehp.1206028>

Online 22 March 2013



NIEHS

**National Institute of
Environmental Health Sciences**

**National Institutes of Health
U.S. Department of Health and Human Services**

Pit Latrines and Their Impacts on Groundwater Quality: A Systematic Review

Jay P. Graham and Matthew L. Polizzotto

Department of Environmental and Occupational Health and Department of Global Health,
George Washington University School of Public Health and Health Services, Washington, DC,
USA

Corresponding author:

Jay P. Graham, PhD

School of Public Health and Health Services

Department of Environmental and Occupational Health

Department of Global Health

George Washington University

Washington, DC

Phone: (202) 994-2392

Fax: (202) 994-0011

Email: jgraham@gwu.edu

SHORT RUNNING TITLE: The Impact of Pit Latrines on Groundwater Quality

KEY WORDS: groundwater; latrine; privy; sanitation; siting standards; water quality

ACKNOWLEDGEMENTS:

JPG and MLP contributed equally to this publication. We thank Taylor Barto, Deise Galan, Richard Hinton, and three anonymous reviewers for helpful input to the analysis.

DECLARATION OF FINANCIAL INTERESTS: The authors have no financial interests to declare.

ABBREVIATIONS AND DEFINITIONS:

UN – United Nations

WHO – World Health Organization

ABSTRACT

Background: Pit latrines are one of the most common human excreta disposal systems in low-income countries, and their use is on the rise as countries aim to meet the sanitation-related target of the Millennium Development Goals. There is concern, however, that pit latrine discharges of chemical and microbial contaminants to groundwater may negatively affect human health.

Objectives: Our goals were to 1) calculate global pit latrine coverage, 2) systematically review empirical studies of the impacts of pit latrines on groundwater quality, 3) evaluate latrine siting standards, and 4) identify knowledge gaps regarding the potential for and consequences of groundwater contamination by latrines.

Methods: We used existing survey and population data to calculate global pit latrine coverage. We reviewed the scientific literature on the occurrence of contaminants originating from pit latrines and considered the factors affecting transport of these contaminants. Data were extracted from peer-reviewed articles, books and reports identified using Web of ScienceSM, PubMed, Google, and document reference lists.

Discussion: We estimated that approximately 1.77 billion people use pit latrines as their primary means of sanitation. Studies of pit latrines and groundwater are limited and have generally focused on only a few indicator contaminants. Although groundwater contamination is frequently observed downstream of latrines, contaminant transport distances, recommendations based on empirical studies, and siting guidelines are variable and not well aligned with one another.

Conclusions: In order to improve environmental and human health, future research should examine a larger set of contextual variables, improve measurement approaches, and develop better criteria for siting pit latrines.

INTRODUCTION

An estimated 2.6 billion people lack access to improved sanitation— defined as facilities that hygienically separate human excreta from human contact (WHO/UNICEF 2010). Improved sanitation includes toilets connected to sewers, septic systems, water-based toilets that flush into pits, simple pit latrines, and ventilated improved pit latrines. There is strong evidence that access to improved sanitation can reduce diarrhea morbidity and mortality and soil transmitted helminths (Albonico et al. 2008; Cairncross et al. 2010b).

The United Nations (UN), through the Millennium Development Goals, has set a target of halving by 2015 the proportion of the population without sustainable access to improved sanitation. To achieve this target, ~1 billion people in urban areas and 900 million people in rural areas must gain access to improved sanitation by 2015 over the baseline year, 1990 (WHO/UNICEF 2012). In low-income countries (with a gross national income per capita of \$1,025 or less), a large portion of households use improved or unimproved pit latrines due to their low cost and availability (Cairncross et al. 2010a; Jain 2011). Improved pit latrines are the most basic and inexpensive form of improved sanitation and typically consist of a pit – circular, rectangular or square – dug into the ground and covered with a concrete slab or floor with a hole through which excreta falls. Unimproved pit latrines are those without slabs or platforms.

In concert with sanitation goals, the United Nations has also set explicit targets to increase the proportion of the global population using an improved drinking-water source. In the context of low-income countries, water from improved sources is frequently derived from groundwater via protected springs, protected dug wells, tubewells, and boreholes (UN 2008). Thus, the use of

groundwater – typically receiving no subsequent treatment to improve quality – for drinking water supplies is increasing dramatically (Rosa and Clasen 2010).

Due to the increasing uses of both pit latrines and groundwater resources in low-income countries, there is concern that pit latrines may cause human and ecological health impacts associated with microbiological and chemical contamination of groundwater. Pit latrines generally lack a physical barrier, such as concrete, between stored excreta and soil and/or groundwater (vanRyneveld and Fourie 1997). Accordingly, contaminants from pit-latrines excreta may potentially leach into groundwater, thereby threatening human health through well-water contamination. In this paper, we assess the known and measured environmental health impacts associated with groundwater contamination by pit latrines. In particular, we 1) calculate global pit latrine coverage, 2) systematically review empirical studies of the impacts of pit latrines on groundwater quality, 3) evaluate latrine siting standards, and 4) identify knowledge gaps regarding the potential for and consequences of groundwater contamination by latrines.

METHODS

Global pit latrine coverage

We used existing survey data to estimate the percentages of people per country who 1) use pit latrines for sanitation, 2) do not have any sanitation facilities, and 3) use groundwater sources for drinking water. Data from the most recent reports for each country were obtained from *Demographic and Health Surveys* (USAID 2012), *Multiple Indicator Cluster Surveys* (UNICEF 2012), and China's *Economic, Population, Nutrition, and Health Survey* (WHO/UNICEF 2012a). Both improved latrines (including pour/flush to pit latrines, ventilated improved latrines,

and pit latrines with slabs) and unimproved latrines (including traditional latrines, pit latrines without slabs, and shared latrines) were included when estimating pit latrine use (see Supplemental Material for glossary defining different types of sanitation). Composting toilets, considered improved facilities, were not included in our analysis, and nor were sanitation facilities where final disposal of human excreta is unknown – hanging latrines and bucket latrines, for example. For estimates of the proportions of improved versus unimproved latrines, we assumed that unspecified latrines were split evenly between improved and unimproved latrines. Data for people without a sanitation facility include “no facility” and “open defecation in bush/field”. National survey data do not typically characterize shared facilities, as they are considered unimproved sanitation. For shared sanitation, we applied the average proportion of facilities that were pit latrines (44%) based on 7 national surveys that provided more detailed information (see Supplemental Material, Table S1). Groundwater use comprised both improved and unimproved modes of accessing groundwater, including tubewells/boreholes, protected wells, protected springs, unprotected wells, and unprotected springs, but not centralized water sources that may originate from groundwater.

To calculate the global totals, we multiplied country-wide percentages by United Nations estimates of 2010 populations (United Nations 2011) and summed all data (see Supplemental Material, Table S1). We used our estimate of global latrine use in conjunction with estimated excreta production rates of 1200 g urine/person/day and 350 g wet feces/person/day for rural developing country settings (Feacham et al. 1983) to estimate daily quantities of urine and feces deposited into latrines.

Review of studies on groundwater contamination from pit latrines

To find relevant documents describing groundwater contamination derived from pit latrines the Web of ScienceSM, PubMed and Google were searched using the following keywords: “[pit latrine AND groundwater]”, “[privy AND groundwater]”, “[toilet AND groundwater]”, “[sanitation AND groundwater]”, “[pit latrine AND aquifer]”, “[privy AND aquifer]”, “[toilet AND aquifer]”, “[sanitation AND aquifer]”, “[pit latrine AND ground water]”, “[privy AND ground water]”, “[toilet AND ground water]”, “[sanitation AND ground water]”, “[pit latrine AND water quality]”, “[privy AND water quality]”, “[toilet AND water quality]”, “[pit latrine AND well water]”, “[privy AND well water]”, and “[toilet AND well water]”. We also searched the resulting reference lists and contacted experts to identify additional articles. In order to provide a critical review of the literature on the occurrence of microbiological and chemical contaminants originating from pit latrines, we more fully characterized the studies that either directly assessed the fate and transport of contaminants from pit latrines or studies that applied statistical methods to estimate a measure of risk associated with the presence of pit latrines. By synthesizing existing results in terms of pit latrine and well installation siting guidelines, we identified research gaps which must be addressed in order to make better informed decisions to protect water quality and safeguard human health.

RESULTS

Global pit latrine coverage

Globally, there is great variability in latrine coverage. We estimate that approximately 1.77 billion people around the world use some form of pit latrines as their primary means of sanitation

(Figure 1 and Supplemental Material, Table S1). In addition, we estimate that 48% of people using pit latrines use facilities characterized as improved, whereas the remainder uses shared or unimproved facilities (e.g. traditional latrines or pit latrines without slabs). The number of users per latrine varies by locale, but based on the excreta production rates of Feacham et al. (1983), globally as much as 2.1 billion kg of urine and 0.6 billion kg of feces are deposited into latrines daily. In the countries where pit latrines are prevalent, we calculate that >2 billion people depend on groundwater for their primary drinking water supply (Supplemental Material, Table S1).

These calculations are among the first estimates of the numbers of people using pit latrines and groundwater in low-income countries. Because some national survey data are several years old, estimates have a fair degree of uncertainty at the country level. However, our estimate for the total number of people without any sanitation facility (1.11 billion) is in agreement with the independently calculated Joint Monitoring Program 2010 estimate for open defecation (1.1 billion people) (WHO/UNICEF 2012b), which suggests that our approximations may be more robust at the global level. In addition, our estimate of the total 2010 population for countries included in this analysis (5.22 billion) is consistent with the UN population estimate for “less developed regions” [or “all regions of Africa, Asia (excluding Japan), Latin America and the Caribbean plus Melanesia, Micronesia and Polynesia”] of 5.66 billion (United Nations 2011).

Studies on groundwater contamination from pit latrines

Twenty-four studies directly assessed the transport of contaminants or applied statistical methods to estimate a measure of risk associated with the presence of pit latrines (Table 1) – these studies either assessed chemical contaminants (4 studies), microbial contaminants (2), or both (18

studies). Human excreta are the main input to pit latrines, though other inputs may contribute significantly to pit contents depending on local practices (see Supplemental Material, Inputs to Pit Latrines, for additional details). Human feces harbor a large number of microbes, including bacteria, archaea, microbial eukarya, viruses, and potentially protozoa and helminths (Supplemental Material, Table S2) (Feachem et al. 1983; Ley et al. 2006; Ramakrishna 2007). The largest chemical concerns from excreta disposed in on-site sanitation systems are considered to be nitrate (BGS 2002; Fourie and Vanryneveld 1995; Pedley et al. 2006), phosphate (Fourie and Vanryneveld 1995), and chloride (BGS 2002) (Supplemental Material, Table S3).

Microbiological contaminants associated with pit latrines

Concentrations of most fecal microorganisms decline after feces have been excreted, but these microorganisms may still impair groundwater quality. A number of approaches have been used to define the quantities and transport distances of latrine-derived microbial contaminants. The majority of studies that assessed microbiological quality of groundwater in relation to pit latrines applied culture-based assays to measure fecal indicator bacteria (Table 1), including total coliforms, fecal coliforms, and *Escherichia coli* (previously known as *Bacillus coli*), which occur in high concentrations in the feces of healthy adults and have epidemiological evidence to support their use as indicators of water quality (Wade et al. 2003). Caldwell conducted five experimental studies in the 1930s and included the colon aerogenes group and anaerobic bacteria, in addition to *B. coli*, in her analyses (Caldwell 1937a, b, 1938a, b; Caldwell and Parr 1937). Only one study analyzed viruses – adenovirus and rotavirus – to characterize groundwater quality in relation to pit latrines (Verheyen et al. 2009). No studies were identified that assessed protozoa or helminths, which typically exhibit little movement in groundwater due to their size (Lewis et al. 1982).

The extent to which microbes from pit latrine wastes may be transported and contaminate groundwater is largely dependent on the environmental context of the area, particularly hydrological and soil conditions. Nearly half of the studies assessing microbial contaminants used experimental approaches. These studies included either the installation of test wells to measure the quality of water sampled down-gradient of pit latrines or the collection of core soil samples, or both. Kligler (1921) sampled soil at varying distances from more than 50 pit latrines under wet and dry conditions. The maximum distance of bacterial contamination found was up to 5.5 meters away from latrines, occurring under wet and sandy soil conditions. The author suggested that a vertical distance of at least 3 to 4.5 meters was required between the bottom of the pit and the water table to maintain safe groundwater quality. Caldwell (1937a; 1937b; 1938a; 1938b) and Caldwell and Parr (1937) conducted a number of experimental studies on pit latrines and groundwater and found varying transport distances (ranging from 3 to 25 m) among *B. coli* (i.e. *E. coli*), colon aerogenes (i.e. total coliform bacteria) and anaerobes, depending on the degree of soil saturation and the groundwater flow velocity. In a study of a latrine placed in an alkaline alluvium soil, movement of total coliforms was limited to <7 m from the pit (Dyer 1941). A relatively short transport distance was also found in South Africa, where high fecal coliform counts (>10 cfu/100 ml) were detected only to one meter from a pit latrine (Still and Nash 2002). Dzwaïro et al. (2006) found fecal and total coliform contamination greatly reduced beyond 5 m from pit latrines.

In a study of 12 pour-flush latrines, Banerjee found that transport of total and fecal coliforms increased during the monsoon period and in sandy soils. The author noted the maximum travel distance of bacteria to be 10 meters from pits (Banerjee 2011) (Figure 2). In contrast, a study in

Zimbabwe found that groundwater contamination was higher in the dry season rather than in the wet season, with coliforms detected up to 20 meters from a pit (Chidavaenzi et al. 1997).

Nearly a quarter of the studies analyzed associations between microbiological water quality in pre-existing wells and factors such as proximity of pit latrines to assess latrine impacts on ground water. At a study site in India characterized by a shallow water table and fractured rock aquifer, high concentrations of fecal coliforms were found in domestic wells located near pit latrines and septic tanks. At a contrasting site, characterized by alluvial formations, no to low levels of fecal contamination were detected (Pujari et al. 2012). In a georeferenced spatial study of viral contamination, Verheyen et al. (2009) sampled 287 drinking-water sources (247 water wells, 25 pumps, and 15 surface water samples) proximate to 220 latrines. Adenoviral DNA was repeatedly detected in 26 water sources, and rotaviral RNA was detected in one sample. In multiple rounds of sampling, 40 of 287 drinking-water sources were positive for viral contamination at least once. The authors found a significant positive association between viral contamination of a water source and at least one latrine within a radius of 50 m (Figure 2). The authors hypothesized that during the wet season, viruses were transported by groundwater flow in the upper part of the soil, while viral transport in the dry season was more likely due to virus-contaminated surface water.

Associations between groundwater contamination and factors related to sanitation facilities are complicated by the co-occurrence of multiple contaminant sources, particularly when information on groundwater flow patterns is not available. A study of groundwater quality in an informal settlement of Zimbabwe found detectable total and fecal coliforms in over two-thirds of study boreholes and existing domestic wells (Zingoni et al. 2005). The abundance of pit latrines, used in more than 75% of the households, and the presence of informal trading areas within the

settlement were likely sources of fecal pollution. The authors suggested that shallow wells and boreholes in the study area, as well as the incomplete lining of most latrines were contributing factors to high levels of groundwater contamination (Zingoni et al. 2005). Authors of a study conducting in Moldova concluded that groundwater pollution within villages was likely due to latrines, livestock and stored manure, solid-waste landfills and leakage from wastewater pits (Banks et al. 2002).

Importantly, even in areas with high pit latrine densities, microbiological groundwater contamination may not necessarily be detected. Three studies found no strong positive association between poor bacteriological water quality and sanitary surveys or proximity to latrines (Ahmed et al. 2002; Howard et al. 2003; Tandia et al. 1999), although Ahmed et al. (2002) found fecal coliforms and streptococci in sediments 10 m below latrines.

Movement of bacteria from latrines is often limited by formation of a “scum mat” which develops around the latrine pit and reduces the movement of fecal bacteria (BGS 2002; Caldwell 1937a). This mat (also referred to as a “biologically active layer”, “biolayer”, and “clogged” zone) enhances bacteria removal through filtration and predation by antagonistic organisms, but may take several months to develop around new latrines (Caldwell and Parr 1937). Additionally, clogging may result from blockage of soil pores by solids that have been filtered out, swelling of clay minerals, and precipitation of insoluble salts (Franceys et al. 1992). A study testing liners as a way to reduce groundwater contamination due to pit latrines found fecal coliforms in soil samples taken adjacent to only one of five peat-lined pits, compared with three of three unlined pits (Nichols et al. 1983). The one peat-lined pit that showed contamination was located in shallow and rocky soil and was under saturated conditions.

Chemical contaminants associated with pit latrines

Nitrate. Owing to high concentrations of nitrogen in human excreta, its adverse impacts to human health, and its use as an indicator of fecal contamination, nitrate has been the most widely investigated chemical contaminant derived from pit latrines. Consumption of high concentrations of nitrate in drinking water is known to cause methemoglobinemia and associations with cancer in humans have been observed, although not consistently (Fewtrell 2004; WHO 2011). The World Health Organization recommended guideline for nitrate in drinking water is 50 mg/L (WHO 2011). Concentrations of nitrate in well water near latrines are highly variable. Although a number of studies that detected total or fecal coliforms did not detect elevated nitrate concentrations in wells (Ahmed et al. 2002; Dzwauro et al. 2006; Howard et al. 2002; Padmasiri et al. 1992; Still and Nash, 2002), other studies have reported nitrate concentrations > 100 mg/L (Banks et al. 2002; Girard and Hillaire-Marcel 1997; Lewis et al. 1980; Mafa 2003; Pujari et al. 2012; Tandia et al. 1999). Frequently, groundwater nitrate concentrations near latrines were above local background levels, even if they remained below or close to the WHO guideline (Baars 1957; Caldwell and Parr 1937; Chidavaenzi et al. 2000; Jacks et al. 1999; Zingoni et al. 2005).

High nitrate concentrations have been attributed to latrines through association and assumptions based on general proximity, but pinpointing the actual sources of nitrate in groundwater has proved challenging (WHO 2006). Nitrate may be derived from numerous potential sources in urban and rural environments, including latrines, plant debris, animal manure, garbage repositories, livestock pens, soil, and fertilizers (Girard and Hillaire-Marcel, 1997; Howard et al. 2002; Melian et al. 1999; Vinger et al. 2012), and nitrate can be formed and lost through natural soil processes (Jacks et al. 1999). Jacks et al. (1999) used mass-balance calculations to estimate

that 1-50% of nitrogen leached to groundwater from latrines in Botswana. Although significant quantities of leached nitrate may have been lost to denitrification in poorly drained soils, the calculations suggested that nitrogen loss from latrines helped describe the high nitrate concentrations of groundwater (50 mg/L) in the area. The authors concluded that moving drinking wells outside of the habituated area would help avoid nitrate contamination of drinking water.

Girard and Hillaire-Marcel (1997) used nitrogen isotopes to determine the source of nitrate pollution in a fractured rock aquifer of Niger. Due to fermentation of feces and ammonia volatilization in latrines, isotopic enrichment of residual matter creates a nitrate source that is isotopically distinguishable from nitrate of other sources. Nitrate concentrations in wells reached 11.6 meq/L, which findings suggested was a consequence of contamination by latrines and deforestation; the researchers cautioned that given annual population growth rates and increased latrine densities, wells that were safe nitrate concentrations at the time of the study might become polluted in the future.

A more common approach in identifying nitrate sources has been to compare areas with similar environmental characteristics but different population and latrine densities. By analyzing water samples from installed boreholes in an informal settlement in Zimbabwe, Zingoni et al. (2005) demonstrated that the highest nitrate concentrations in groundwater (20-30 mg/L) were associated with the highest population and pit latrine densities of the settlement. In Siberia and Kosova, nitrate concentrations were sometimes found to be >100 mg/L in groundwater of villages with high latrine densities and minimal septic tanks, but concentrations were below hazardous levels in agricultural and unpopulated settings (Banks et al. 2002). Groundwater

nitrate concentrations also correlated with proximity to pollution sources, including pit latrines, in Senegal and South Africa (Tandia et al. 1999; Vinger et al. 2012).

Environmental factors also play a role in governing groundwater pollution from latrines. Pujari et al. (2012) compared the impacts of on-site sanitation in two Indian mega-cities and concluded that hydrogeologic conditions were strong predictors of the threat of nitrate contamination of well water; an area with shallow groundwater was more susceptible to pollution from latrines than an area with a deeper water table. In eastern Botswana, buildup of nitrogenous latrine effluent in soils and subsequent downward leaching of nitrate appeared to promote dissolved nitrate concentrations above 500 mg/L in groundwater, and the authors concluded that the fissured bedrock aquifer allowed for rapid contaminant transport (Lewis et al. 1980). Whereas soil type immediately below the pit is likely to influence the degree of nitrate transport (Caldwell and Parr 1937), associations with soil type were not always observed (Nichols et al. 1983). Additionally, in an area with high nitrogen loading from latrines but where groundwater was devoid of oxygen, nitrate concentrations were minimal, presumably because of denitrification (Ahmed et al. 2002).

Thus, both environmental conditions and human factors are major drivers of nitrate contamination from latrines, and the highest concentrations in well water are expected to be found downstream of areas with high latrine use (Chidavaenzi et al. 2000; Mafa 2003; Vinger et al. 2012). Once leached from latrines, a number of factors may control nitrate travel distances. Certain chemical contaminants may be transported further than microbial contaminants because they are not as inhibited by the biolayer that commonly forms around latrines (Caldwell and Parr 1937). Similarly, peat-lined pits were associated with reduced bacterial and phosphate transport from latrines, but appeared to be ineffective in limiting nitrate (Nichols et al. 1983). In contrast,

Chidavaenzi et al. (2000) estimated that the nitrogen influence from latrines extended only 5 m from the latrine source, whereas microbial contamination extended up to 20 m downstream. In a small study by Padmasiri et al. (1992), the authors observed decreases in soil nitrate concentrations by 1.5 m from the latrine. Overall, although data are sparse, direct measurements and estimates of lateral transport distances for high levels of pit-latrines-derived nitrate – where it has been detected – range from approximately 1–25 m (Caldwell and Parr 1937; Caldwell 1938b; Lewis et al. 1980; Chidavaenzi et al. 2000; Still and Nash 2002; Vinger et al. 2012) (Figure 2).

Chloride. After nitrate, chloride has been the most commonly investigated chemical indicator of groundwater contamination by latrines due to its high concentrations in excreta and relative mobility in the subsurface. Although there are no known health risks from chloride in drinking water, concentrations >250 mg/L may impact the taste and acceptability of water (WHO 2011). In a study from Botswana, the highest chloride concentrations in soils were found closest to latrines (Lewis et al. 1980). Dissolved concentrations reached 400 mg/L at shallow depths but then decreased with depth and distance from latrines in Bangladesh (Ahmed et al. 2002). Chloride is typically transported with minimal retention during groundwater flow, and concentrations frequently track with nitrate levels (Banks et al. 2002; Caldwell 1938b; Caldwell and Parr 1937; Jacks et al. 1999; Lewis et al. 1980; Tandia et al. 1999), unless subsurface conditions promote nitrate reduction (Ahmed et al. 2002). Variable distributions of latrine contaminants due to pumping and seasonal fluctuations have been demonstrated by studies using chloride salts as tracers (Banerjee 2011; Lewis et al. 1980).

Ammonia. Ammonia, derived either directly from latrine waste or following denitrification of nitrate released from latrines, has not been found to accumulate appreciably in groundwater near latrines. In a study of three pit latrines, Dzwaairo et al. (2006) observed only one incidence of

NH_4^+ >1.5 mg/L in well water that was microbiologically contaminated from latrines. In groundwater with latrine-derived nitrate concentrations that exceeded 500 mg/L, Lewis et al. (1980) found ammonium <0.2 mg/L in all wells but one, which reached 3 mg/L. Similarly, ammonium was below the South African National Standard (2 mg/L) in all water samples analyzed by Vinger et al. (2012). Soil concentrations of ammonium decreased substantially between 1 and 1.5 m from latrine pits (Padmasiri et al. 1992). Ammonia tends to accumulate and persist under anaerobic conditions, and high concentrations are likely when the water table intersects the base of the latrine pit (Ahmed et al. 2002; Baars 1957; Dzwaairo et al. 2006).

Other chemicals derived from pit latrines. Nitrite concentrations in well water near latrines have typically been below drinking water standards (Baars 1957; Vinger et al. 2012), although when present, it has been found in association with nitrate and chloride (Caldwell 1938b; Caldwell and Parr 1937). Phosphate is fairly immobile, and when it was released from latrines, its penetration into soils was minimal (Padmasiri et al. 1992); peat liners further reduced potential transport (Nichols et al. 1983). Accordingly, phosphate concentrations in well water have not been detected at concentrations above water quality standards in association with pit latrines (Zingoni et al. 2005).

Elevated groundwater potassium concentrations may also be derived from latrines, and concentrations have been shown to correlate with those of nitrate and chloride (Banks et al. 2002). The impact of latrines on sulfate concentrations remains unclear, perhaps due to the prevalence of sulfate sources and the number of processes that may remove it from solution in the subsurface. Although Banks et al. (2002) found no evidence that latrines influenced sulfate concentrations in well water, Chidavaenzi et al. (2000) observed increases in sulfate concentrations near latrines during the wet season. Latrines also have been associated with

increased well water turbidity (Dzwairo et al. 2006). Finally, Mafa (2003) measured high dissolved organic carbon concentrations in wells down-gradient of latrines, which might contribute to reducing conditions and elevated dissolved iron concentrations (Zingoni et al. 2005).

DISCUSSION

Pit latrine guidelines for mitigating groundwater impacts

In relation to on-site sanitation, the factors controlling transport of microbial and chemical contaminants in the subsurface have been the subject of several reviews (BGS 2002; Dillon, 1997; Gerba et al. 1975; Lewis et al. 1982; WHO 2006), and there is extensive literature that more broadly quantifies contaminant transport processes in groundwater (e.g. Schijven and Hassanizadeh, 2000). Soil/rock type, natural and human-altered groundwater flow rates and paths, and the biogeochemical environment of the subsurface all govern contaminant travel distances and rates. Tracking the movement of contaminants is further complicated by microbial die-off and chemical transformations, which may occur heterogeneously over space and time. The potential for widespread groundwater contamination from pit latrines is also impacted by social factors, such as latrine use, latrine densities, maintenance, and groundwater pumping. Latrine type, design, materials, and construction quality also influence contaminant containment and leaching from pit latrines. Thus, to effectively evaluate the safety of pit latrine and groundwater source proximity both environmental and anthropogenic factors must be considered.

Among the studies reviewed, specific recommendations for minimizing latrine impacts on groundwater quality varied. Nichols et al. (1983) suggested that pit liners, such as peat liners, should not be used as a substitute for proper soil conditions and recommended that latrines not be built in thin, rocky soils. Dzwauro et al. (2006) highlighted the need to: analyze critical parameters like depth of the infiltration layer and direction of groundwater flow; develop alternative sanitation options, such as raised or lined pit latrines, to minimize groundwater impacts; and apply an integrated approach, involving geotechnology and hydrogeology, to solve sanitation problems. Pujari et al. (2012) recommended that latrines be discouraged in hard rock areas with shallow water tables. They also suggested that systematic lithological and hydrogeological mapping be conducted and parameters like the depth of the water table, soil characteristics, and rock strata be considered prior to installing latrines. Finally, they advised that monitoring of groundwater sources by responsible agencies be carried out in areas served by on-site sanitation systems; monitoring should include nitrate, chloride, and fecal coliforms. To minimize the leaching of nitrate, Jacks et al. (1999) suggested: painting latrine ventilation tubes black to increase daytime ventilation rates; increasing the pH of latrine contents to increase ammonia volatilization; sealing pits to prevent nitrate leaching and promote denitrification; and diverting urine for use as a fertilizer for deep-rooted crops. Finally, a number of the studies suggested that pit latrines did not appear to pose a major threat to groundwater quality or public health (Caldwell 1938a, b; Chidavaenzi et al. 2000; Howard et al. 2003; Kligler 1921); this conclusion, which runs counter to general consensus, may have been influenced by the specific latrine siting, environmental conditions, and experimental designs of the studies.

Given the varying transport distances observed for microbiological and chemical contaminants originating from pit latrines (Figure 2), researchers have identified a range of latrine siting

guidelines. In their comprehensive review about the risks for groundwater contamination by on-site sanitation sources, Lewis et al. (1982) noted the “traditional” guideline of 15 m as a safe distance between wells and sanitation units. Based on statistical associations between latrines and nitrate concentrations in water sources, Tandia et al. (1999) recommended distances of 20 m, 36 m and 48 m for pits that are in use for <1 decade, in use for 1 to 2 decades and in use for >2 decades, respectively. Banks et al. (2002) suggested that pit latrines should be located no less than 15-30 m from groundwater abstraction points and should terminate no less than 1.5-2.0 m above the water table. Banerjee (2011) concluded that with the exception of fissured rock, the safe distance between a pit latrine and water source is 10 meters. Vinger et al. (2012) suggested that wells are likely to be contaminated if pit latrines are less than 12 meters away.

Additionally, countries and development agencies often have siting standards for latrine construction. In Haiti for example, latrines must be sited at least 30 meters from any surface water source or drinking water source, and the bottom of the pit must be at least 1.5 meters above the maximum height of the water table (Reed 2010). South Africa’s groundwater guidelines recommend that pit latrines are located at least 75 meters from water sources (Still and Nash 2002). The WHO suggests minimal risk of groundwater pollution where >2 m of relatively fine soil exists between a pit and the groundwater table, assuming fill rates are below 50 L/m²/d (Franceys et al. 1992). Furthermore, 15 m is suggested as the safe lateral separation between pit latrines and the groundwater supply, which can be reduced if the well is not directly down-gradient of the pit (Franceys et al. 1992). However, in a more recent and conservative recommendation that seeks to account for a wide variety of contexts, WaterAid suggests latrines and water points should be separated by at least 50 m (WaterAid 2008). During disaster response, 30 m has been recommended as a minimum standard for the lateral distance between

on-site sanitation systems and water sources, though this value could be adjusted based on the nature of subsurface features (Sphere Project 2011).

Overall, threats to groundwater quality from on-site sanitation can be mitigated through technology design, risk assessment, development of protection zones, and monitoring (Lawrence et al. 2001; Lewis et al. 1982; Robins et al. 2007). For septic systems and more complex on-site sanitation technologies, manuals and siting guidelines are widely accessible (USEPA, 2002), and technology choices generally depend on the available land area for drain fields and vertical separation to the water table. Step-by-step strategies for site-specific analyses of safe sanitation options appropriate for low-income countries are outlined by the British Geological Survey (Lawrence et al. 2001). The British Geological Survey guidelines provide a set of rules for determining the optimum horizontal separation between sanitation facilities and drinking-water sources for a variety of hydrogeological environments. These guidelines have been tested in Bangladesh, Uganda, and Argentina (Ahmed et al. 2002; Blarasin et al. 2002; Howard et al. 2003) and has been advocated by the authors as sensible practice for aquifers for which data are limited and therefore do not otherwise lend themselves to conventional vulnerability assessment.

Moving forward

Pit latrine and groundwater usage are prevalent in a rapidly growing segment of the world population. Given that ~1.11 billion people currently have no sanitation facility (See Supplemental Material), it is expected that pit latrine coverage will increase as people attempt to move up the sanitation ladder from open defecation to basic sanitation (WHO/UNICEF 2012). Our analysis of existing literature reveals five key knowledge gaps that could be addressed to improve our understanding and management of groundwater contamination from pit latrines.

Siting latrines vis a vis wells. Groundwater flow paths are among the most important factors controlling contaminant transport from latrines to water points. In many areas, the subsurface flow regime is unknown. Groundwater flow models are needed to better define the limits of chemical transport and pathogen dispersion (Pedley et al. 2006), particularly for complex groundwater systems such as fractured rock aquifers. Pit latrine sources of contamination are frequently difficult to distinguish from animal waste and agricultural sources of contaminants, and better assessment of groundwater flow conditions will enable dominant contaminant sources to be identified. In locations where horizontal separation of latrines and water points is not possible (e.g. routinely flooded regions), vertical separation has been promoted (Lawrence et al. 2001), but such siting guidelines are not well defined. An improved understanding of contaminant leaching from pit latrines and transport pathways is particularly needed for managing sanitation in densely populated areas, including refugee camps and informal settlements, as well as areas with rapidly growing populations. Siting guidelines need to consider population pressures and the potential for increased groundwater abstraction, which will alter transport distances and rates.

Understudied and emerging contaminants. To date there has been a focus on a limited number of contaminants that may be found in human excreta. Microbiological monitoring has primarily relied on fecal indicator bacteria, while nitrate has been the focus of most chemical studies. In a recent study of groundwater in rural Bangladesh, Ferguson et al. (2012) highlighted that culture-dependent fecal indicators were not always able to predict total bacterial pathogens. Pit latrine additives are used to reduce pit contents, odor, and insect problems, but little research exists on their make-up or the prevalence of their use (Buckley et al. 2008). Emerging organic chemical contaminants, including endocrine disruptors and pharmaceuticals that may be excreted in urine

and feces and may persist in the environment, have not been investigated proximate to pit latrines, but should be quantified, and their potential for transport needs to be assessed. There is also little research on disposal of other chemicals, such as lime, pesticides, and cleaning agents, into latrines. Finally, it remains unclear whether effects of latrine wastes on the groundwater geochemical environment may increase downstream contamination. For instance, excreta contains high quantities of organic carbon (Feacham et al. 1983), and plumes of carbon from latrines may promote reducing conditions within groundwater (Mafa 2003), leading to reductive release of trace elements associated with native aquifer materials (Harvey et al. 2002).

Global climate change. Global climate change is widely recognized as a threat to the safety and reliability of drinking water and sanitation supplies, particularly in low-income countries (WHO, 2009; World Bank, 2012). To date, no studies have specifically addressed these threats in relation to pit latrines and groundwater quality. Many sprawling urban slums, as well as poor rural communities, are currently situated in coastal zones that are flood prone or have high groundwater tables – especially in East Asia (Djonoputro et al. 2010). Rising sea levels will increase the prevalence of flooding and slowly raise groundwater levels, limiting the ability to have safe vertical separation between latrine pits and the saturated zone. Over shorter time scales, escalation of storm intensities will increase the probabilities that groundwater tables will rise above the bottoms of pits at some point during the year, and accordingly, it is likely that contaminant transport from pit latrines to groundwater will increase. Flooding will also likely undermine efforts to increase access to basic sanitation. Urban planning and housing development programs will need better estimates of the potential effects of climate change on on-site sanitation, and additional information to determine appropriate sanitation facility designs for different target populations.

Improved sanitation technologies. Technological upgrades to pit latrines may substantially reduce microbiological and chemical threats to groundwater quality. Latrine liners can minimize seepage of pit contents to groundwater, and raised latrines may help minimize groundwater contamination by increasing vertical separation and promoting aerobic digestion of waste (Dillon 1997; Dzwaïro et al. 2006; Nichols et al. 1983). Urine diverting toilets, painted ventilation tubes, and chemical amendments to latrines can minimize nitrate formation and release to groundwater (Jacks et al. 1999). Composting toilets and ecological sanitation technologies may reduce microbial risks and minimize chemical leaching from pit latrines (Dillon 1997; Endale et al. 2012). However, it remains unclear whether these alternative systems are affordable and culturally acceptable to poor populations in low-income countries (Mariwah and Drangert 2011).

Balancing risks. Despite the potential for groundwater contamination, pit latrines remain an important strategy for improving human excreta disposal. These systems are the most basic option for low-income countries to decrease open defecation rates and increase access to improved sanitation. An intensive effort is needed to develop more robust – yet viable – approaches to siting pit latrines and water sources. There is a need to empirically test proposed guidelines to ensure protection of groundwater quality after implementation under local conditions.

CONCLUSIONS

We estimate that approximately 1.77 billion people around the world use pit latrines. This number is expected to increase as populations grow and countries strive to meet the Millennium Development Goals. In concert, use of groundwater as a primary drinking-water source is also

increasing. Accordingly, there is a growing need to understand how pit latrines may adversely impact groundwater quality and human health.

Despite the widespread global reliance on both pit latrines and groundwater, we found a limited number of studies to have explicitly examined links between groundwater pollution and contamination from pit latrines. Within these studies, the quality of experimental techniques and chosen indicator contaminants varied greatly. In multiple studies conducted near the same location, there were substantial differences in transport distances of microbiological and chemical contaminants (Caldwell 1937a, b, 1938a, b; Caldwell and Parr 1938). Nevertheless, based on available reports, groundwater contamination from pit latrines was frequently detected when it was looked for, and studies observed travel distances of up to 25 m, 50 m, and 26 m for unsafe concentrations of bacteria, viruses, and chemicals, respectively (Caldwell 1937b; Verheyen et al. 2009; Caldwell and Parr 1938). Although these contaminant transport distances could potentially be exceeded under certain conditions (e.g. in fractured rock aquifers), the majority of studies of pit-latrines-derived contaminants actually showed transport distances which were less than half of the maximum values. Areas with shallow groundwater and areas prone to flooding present the greatest risks, as vertical separation is required between the base of latrine pits and the saturated zone.

The ability to make informed decisions about water and sanitation options is largely inhibited by a scarcity of data, especially regarding the influence of environmental conditions on potential contamination. Guidelines are available for site-specific assessment, and general procedures for siting latrines with respect to water points are common (Lawrence et al. 2001). However, recommendations for mitigating groundwater impacts can be both qualitatively and quantitatively variable and it remains unclear whether these guidelines can be implemented under

local conditions. Many countries already face serious development challenges and may not have the resources – human and economic – to implement guidelines (Robins et al. 2007).

In general, siting guidelines vary greatly, and it is often unknown which (if any) empirical studies were used to derive the guidelines. Thus, there is a need to empirically test the effectiveness of specific guidelines under a variety of conditions in order to better merge pit latrine siting guidelines with realistic groundwater threats. Given the scale of pit latrine use, future studies must examine additional contaminants beyond standard indicators, monitor temporal changes in water quality parameters, and evaluate alternative technologies, and more efforts are needed to better understand the effects of population pressures and climate change. We may then make more informed decisions that optimize latrine and groundwater use and improve environmental and human health.

REFERENCES

- Ahmed KM, Khandkar ZZ, Lawrence AR, Macdonald DMJ, Islam MS. 2002. An investigation of the impact of on-site sanitation on the quality of groundwater supplies in two peri-urban areas of Dhaka, Bangladesh. (Assessing Risk to Groundwater from On-site Sanitation: Scientific Review and Case Studies). Nottingham:British Geological Survey.
- Albonico M, Allen H, Chitsulo L, Engels D, Gabrielli AF, Savioli L. 2008. Controlling Soil-Transmitted Helminthiasis in Pre-School-Age Children through Preventive Chemotherapy. *PLoS neglected tropical diseases* 2(3):1-11.
- Baars JK. 1957. Travel of pollution, and purification en route, in sandy soils. *World Health Organ* 16:727-747.
- Banerjee G. 2011. Underground pollution travel from leach pits of on-site sanitation facilities: a case study. *Clean Technol Envir* 13(3):489-497.
- Banks D, Karnachuk OV, Parnachev VP, Holden W, Frengstad B. 2002. Groundwater contamination from rural pit latrines: Examples from Siberia and Kosova. *J Chart Inst Water E* 16(2):147-152.
- BGS. 2002. Assessing Risk to Groundwater from On-site Sanitation: Scientific Review and Case Studies. (Groundwater Systems and Water Quality Programme Commissioned Report CR/02/079N). Keyworth, Nottingham:British Geological Survey.
- Blarasin M, Cabrera A, Frigerio C, Bettera S. 2002. Risk of groundwater pollution by on-site sanitation, geochemical models and geoindicators, Rio Cuarto City, Argentina. (Assessing Risk to Groundwater from On-site Sanitation: Scientific Review and Case Studies). Nottingham:British Geological Survey Commissioned Report.
- Buckley C, Foxon K, Brouckaert C, Rodda N, Nwaneri C, Balboni E, et al. 2008. Scientific Support for the Design and Operation of Ventilated Improved Pit Latrines (Vips) and the Efficacy of Pit Latrine Additives. KwaZulu-Nata:Water Research Commission.
- Cairncross S, Bartram J, Cumming O, Brocklehurst C. 2010a. Hygiene, Sanitation, and Water: What Needs to Be Done? *Plos Med* 7(11).
- Cairncross S, Hunt C, Boisson S, Bostoen K, Curtis V, Fung ICH, et al. 2010b. Water, sanitation and hygiene for the prevention of diarrhoea. *Int J Epidemiol* 39:193-205.

- Caldwell EL. 1937a. Pollution Flow from Pit Latrines When an Impervious Stratum Closely Underlies the Flow. *The Journal of Infectious Diseases* 61(3):270-288.
- Caldwell EL. 1937b. Study of an Envelope Pit Privy. *Journal of Infectious Diseases* 61(3):264-269.
- Caldwell EL. 1938a. Pollution Flow from a Pit Latrine When Permeable Soils of Considerable Depth Exist below the Pit. *Journal of Infectious Diseases* 62(3):225-258.
- Caldwell EL. 1938b. Studies of Subsoil Pollution in Relation to Possible Contamination of the Ground Water from Human Excreta Deposited in Experimental Latrines. *Journal of Infectious Diseases* 62(3):272-292.
- Caldwell EL, Parr LW. 1937. Ground Water Pollution and the Bored Hole Latrine. *Journal of Infectious Diseases* 61(2):148-183.
- Chidavaenzi M, Bradley M, Jere M, Nhandara C. 2000. Pit latrine effluent infiltration into groundwater: the Epworth case study. *Schriftenr Ver Wasser Boden Lufthyg* 105:171-177.
- Chidavaenzi M, Jere M, Bradley M. 1997. Pit latrine effluent infiltration into groundwater. In: *Proceedings of the 23rd WEDC Conference*. Durban, South Africa.
- Dillon P. 1997. Groundwater pollution by sanitation on tropical islands. Paris, France:UNESCO International Hydrological Programme IHP-V Project 6-1.
- Djonoputro ER, Blackett I, Rosenboom JW, Weitz A. 2010. Understanding sanitation options in challenging environments. *Waterlines* 29(3):186-203.
- Dyer BR. 1941. Studies of ground water pollution in an alkaline alluvium soil. *Ind Jour Med Res* 29(4):867-877.
- Dzwairo B, Hoko Z, Love D, Guzha E. 2006. Assessment of the impacts of pit latrines on groundwater quality in rural areas: A case study from Marondera district, Zimbabwe. *Phys Chem Earth* 31(15-16):779-788.
- Endale YT, Yirsaw BD, Asfaw SL. 2012. Pathogen reduction efficiency of on-site treatment processes in eco-sanitation system. *Waste Manage Res* 30(7):750-754.
- Feachem RG, Bradley DJ, Garelick H, Mara DD. 1983. *Sanitation and Disease: Health Aspects of Excreta and Wastewater Management*. New York: John Wiley & Sons Ltd.
- Ferguson AS, Layton AC, Mailloux BJ, Culligan PJ, Williams DE, Smartt AE, et al. 2012. Comparison of fecal indicators with pathogenic bacteria and rotavirus in groundwater. *Sci Total Environ* 431:314-322.

- Fewtrell L. 2004. Drinking-water nitrate, methemoglobinemia, and global burden of disease: A discussion. *Environmental Health Perspectives* 112(14):1371-1374.
- Fourie AB, Vanryneveld MB. 1995. The Fate in the Subsurface of Contaminants Associated with on-Site Sanitation - a Review. *Water Sa* 21(2):101-111.
- Franceys R, Pickford J, Reed R. 1992. *A Guide to the Development of on-Site Sanitation*. England:WHO.
- Gerba CP, Wallis C, Melnick JL. 1975. Fate of wastewater bacteria and viruses in soil. *Journal of the Irrigation and Drainage Division* 101(3):157-175.
- Girard P, Hillaire-Marcel C. 1997. Determining the source of nitrate pollution in the Niger discontinuous aquifers using the natural $^{15}\text{N}/^{14}\text{N}$ ratios. *Journal of Hydrology* 199:239-251.
- Harvey CF, Swartz CH, Badruzzaman AB, Keon-Blute N, Yu W, Ali MA, et al. 2002. Arsenic mobility and groundwater extraction in Bangladesh. *Science* 298(5598):1602-1606.
- Howard G, Teuton J, Luyima P, Odongo R. 2002. Water usage patterns in low-income urban communities in Uganda: implications for water supply surveillance. *International Journal of Environmental Health Research* 12(1):63-73
- Howard G, Pedley S, Barrett M, Nalubega M, Johal K. 2003. Risk factors contributing to microbiological contamination of shallow groundwater in Kampala, Uganda. *Water Research* 37(14):3421-3429.
- Jacks G, Sefe F, Carling M, Hammar M, Letsamao P. 1999. Tentative nitrogen budget for pit latrines – eastern Botswana. *Environmental Geology* 38(3):199-203.
- Jain N. 2011. Getting Africa to meet the sanitation MDG: Lessons from Rwanda. *Water and Sanitation Program*.
- Kligler IJ. 1921. Investigation on soil pollution and the relation on the various types of privies to the spread of intestinal infections. New York: The Rockefeller Institute for Medical Research.
- Lawrence AR, Macdonald DMJ, Howard AG, Barrett MH, Pedley S, Ahmed KM, et al. 2001. ARGOSS 2001. Guidelines for Assessing the Risk to Groundwater from On-Site Sanitation. Keyworth, Nottingham: British Geological Survey.
- Lewis WJ, Farr JL, Foster SSD. 1980. The pollution hazard to village water supplies in eastern Botswana. *Proceedings - Institution of Civil Engineers* 69.

- Lewis WJ, Foster SSD, Drasar BS. 1982. The risk of groundwater pollution by on-site sanitation in developing countries. Duebendorf, Switzerland:International Reference Centre for waste disposal.
- Ley RE, Peterson DA, Gordon JI. 2006. Ecological and evolutionary forces shaping microbial diversity in the human intestine. *Cell* 124(4):837-848.
- Mafa B. 2003. Environmental Hydrogeology of Francistown: Effects of Mining and Urban Expansion on Groundwater Quality. Botswana Department of Geological Survey and Federal Institute for Geosciences and Natural Resources.
- Mariwah S, Drangert JO. 2011. Community perceptions of human excreta as fertilizer in peri-urban agriculture in Ghana. *Waste Manage Res* 29(8):815-822.
- Melian R, Myrlian N, Gouriev A, Moraru C, Radstake F. 1999. Groundwater quality and rural drinking-water supplies in the Republic of Moldova. *Hydrogeology J* 7:188-196.
- Nichols DS, Prettyman D, Gross M. 1983. Movement of Bacteria and Nutrients from Pit Latrines in the Boundary Waters Canoe Area Wilderness. *Water Air Soil Poll* 20(2):171-180.
- Padmasiri JP, Jayatilake GM, Kotuwegedara JPK. 1992. Groundwater pollution from double pit latrines. In: *Proceedings of the 18th WEDC Conference*. Kathmandu, Nepal. 239-241.
- Pedley S, Yates M, Schijven JF, West J, Howard G, Barrett M. 2006. Pathogens: Health relevance, transport and attenuation. In: *Protecting Groundwater for Health: Managing the Quality of Drinking-Water Sources*, (Organization WH, ed). London:WHO and IWA.
- Pujari PR, Padmakar C, Labhasetwar PK, Mahore P, Ganguly AK. 2012. Assessment of the impact of on-site sanitation systems on groundwater pollution in two diverse geological settings--a case study from India. *Environ Monit Assess* 184(1):251-263.
- Ramakrishna BS. 2007. The normal bacterial flora of the human intestine and its regulation. *J Clin Gastroenterol* 41(5):S2-S6.
- Reed B. 2010. Emergency Excreta Disposal Standards and Options for Haiti Leicestershire, UK:DINEPA and Global WASH Cluster 2010.
- Robins NS, Chilton PJ, Cobbing JE. 2007. Adapting existing experience with aquifer vulnerability and groundwater protection for Africa. *J Afr Earth Sci* 47(1):30-38.
- Rosa G, Clasen T. 2010. Estimating the Scope of Household Water Treatment in Low- and Medium-Income Countries. *American Journal of Tropical Medicine and Hygiene* 82(2):289-300.

- Schijven JF, Hassanizadeh SM. 2000. Removal of viruses by soil passage: overview of modeling, processes and parameters. *Critical Reviews in Environmental Science and Technology*, 30(1):49-127.
- Sphere Project. 2011. Minimum Standards in Water Supply, Sanitation and Hygiene Promotion. In: *Humanitarian Charter and Minimum Standards in Disaster Response*. Geneva, Switzerland: Practical Action Publishing.
- Still DA, Nash SR. 2002. Groundwater Contamination Due to Pit Latrines Located in a Sandy Aquifer a Case Study from Maputaland. In: *Water Institute of Southern Africa Biennial Conference*. Durban, South Africa: Water Institute of Southern Africa, 1-6.
- Tandia AA, Diop ES, Gaye CB. 1999. Nitrate groundwater pollution in suburban areas: example of groundwater from Yeumbeul, Senegal. *Journal of African Earth Sciences*, 29(4):809-822.
- Taylor HG, Yeates KO, Wade SL, Drotar D, Stancin T, Montpetite M. 2003. Long-term educational interventions after traumatic brain injury in children. *Rehabil Psychol* 48(4):227-236.
- UN. 2008. *The Millennium Development Goals Report*. New York:United Nations.
- USEPA. 2002. *Onsite Wastewater Treatment Systems Manual*. Washington DC: US Environmental Protection Agency. EPA/625/R-00/008.
- vanRyneveld MB, Fourie AB. 1997. A strategy for evaluating the environmental impact of on-site sanitation systems. *Water Sa* 23(4):279-291.
- Verheyen J, Timmen-Wego M, Laudien R, Boussaad I, Sen S, Koc A, et al. 2009. Detection of Adenoviruses and Rotaviruses in Drinking Water Sources Used In Rural Areas of Benin, West Africa. *Applied and Environmental Microbiology* 75(9):2798-2801.
- Vinger B, Hlophe M, Selvaratnam M. 2012. Relationship between nitrogenous pollution of borehole waters and distances separating them from pit latrines and fertilized fields. *Life Science Journal* 9(1):402-407.
- Wade TJ, Pai N, Eisenberg JNS, Colford JM. 2003. Do US Environmental Protection Agency water quality guidelines for recreational waters prevent gastrointestinal illness? A systematic review and meta-analysis. *Environmental Health Perspectives* 111(8):1102-1109.
- WaterAid. 2008. *Technology Notes*. Available: http://www.wateraid.org/documents/plugin_documents/technology_notes_2011.pdf [accessed 5 December, 2012].

- WHO. 2011. Nitrate and nitrite in drinking-water. (Background document for development of WHO Guidelines for Drinking-water Quality). Geneva, Switzerland:World Health Organization.
- WHO. 2009. Protecting Health from Climate Change: Connecting Science, Policy and People. Geneva, Switzerland:World Health Organization.
- WHO. 2006. Protecting Groundwater for Health: Managing the Quality of Drinking-water Sources. London: World Health Organization.
- WHO/UNICEF. 2010. Progress on sanitation and drinking-water – 2010 Update. Available: http://whqlibdoc.who.int/publications/2010/9789241563956_eng_full_text.pdf [accessed 5 December, 2012].
- WHO/UNICEF. 2012. Progress on Drinking Water and Sanitation: 2012 Update. Available: <http://www.unicef.org/media/files/JMPReport2012.pdf> [accessed 5 December, 2012].
- World Bank. 2012. Turn Down the Heat: Why a 4°C Warmer World Must be Avoided. Washington DC: The World Bank.
- Zingoni E, Love D, Magadza C, Moyce W, Musiwa K. 2005. Effects of a semi-formal urban settlement on groundwater quality Epworth (Zimbabwe): Case study and groundwater quality zoning. Phys Chem Earth 30(11-16):680-688.

Table 1. Summary of selected studies that assess groundwater or soil contamination associated with pit latrines^a.

Source	Country	Number of Latrines in Study ^b	Experimental Design	Subsurface Conditions	Sampling Timeframe ^c	Water Quality Parameters ^d	Conclusions
Vinger et al. 2012	South Africa	15	Sampled existing wells	No data	June – July	Ammonia, Nitrate, Nitrite	Higher levels of contaminants observed at distances <11m from pit latrines
Pujari et al. 2012	India	7	Sampled existing wells	Fine loamy silt, sandy loam, intermittent clay	Summer and monsoon seasons	Fecal coliforms, Total Dissolved Solids, Nitrate	No to low levels of nitrate and fecal coliforms observed
Banerjee 2011	India	12	Installed test wells	Saturated and unsaturated soils of gravel, sand, silt, clay, and laterite	Pre-monsoon and monsoon seasons	Total coliforms, Fecal coliforms, Chloride solution used as tracer	Movement of chloride tracers and coliforms limited to less than 10.2m from pits
Verheyen et al. 2009	Benin	220	Sampled existing wells	No data	Wet and dry seasons, 2003-2007	Adenovirus, Rotavirus	Viral contamination of groundwater associated with latrine proximity
Dzwauro et al. 2006	Zimbabwe	3	Installed test wells	Saturated and unsaturated sandy soils	February – May, 2005	Ammonia, Nitrate, Turbidity, pH, Conductivity, Total coliforms, Fecal coliforms	Fecal coliform movement greatly reduced beyond 5m from pits. All nitrate levels and 99% of ammonia levels met WHO drinking water standards.
Zingoni et al. 2005	Zimbabwe	Not specified	Sampled existing wells and installed test wells	No data	No data	Na, Zn, Cu, Co, Fe, Phosphate, Nitrate, Total coliforms, Fecal coliforms	Elevated levels of nitrate and coliform bacteria in most parts of study area
Mafa 2003	Botswana	Not specified	Sampled existing wells	Fractured rock, overlain by alluvial sediment, clay, sand and weathered rock	July and August, 2000	Broad set of hydrochemical analyses	Elevated levels of nitrate in several zones where pit latrines were common
Banks et al. 2002	Kosova, Moldova, Siberia	Not specified	Sampled existing wells and springs	No data	1996 – 2000	Chloride, Sulfate, Potassium, Nitrate	Elevated levels of nitrate likely due to latrines
Howard et al. 2003	Uganda	Not specified	Sampled protected springs	Highly variable: clay to sandy soils	Monthly, March 1998 – April 1999	Fecal Streptococci, Fecal coliforms, Nitrate	No significant relationship between microbiological contamination and pit latrine proximity
Still and Nash 2002	South Africa	1	Installed test wells	No data	Bi-monthly, 2000 – 2002	Fecal coliforms, Nitrate	Low levels of nitrate (< 10 mg/L) and fecal coliforms (10 cfu/100 mL) found beyond 1m of latrine
Ahmed et al. 2002	Bangladesh	Not specified	Sampled existing wells	Two aquifer systems; clay, silt, and fine-coarse sand	2 – 8 week intervals, 1998 – 1999	Fecal Streptococci, Fecal coliforms, Broad set of hydrochemical analyses	Bacteriological water quality generally good (<10 FC/100mL); water quality poorly correlated with sanitary surveys
Chidavaenzi et al. 2000	Zimbabwe	2	Installed test wells	Stratified fine-grained sandy soils	Wet and dry seasons	Nitrogen, Coliforms	Rapid reductions in coliform, sulfate and nitrogen levels within 5m from pits; contamination present up to 20m.
Jacks et al. 1999	Botswana	4	Sampled existing wells	Well-drained and poorly drained soils	No data	Phosphorous, Nitrogen isotopic ratios, Chloride	Variable nitrate leaching from pit latrines
Tandia et al. 1999	Senegal	Not specified	Sampled existing wells	Fine to coarse sand	July and November, 1989	Broad set of hydrochemical analyses, Fecal coliforms	Nitrate contamination in water strongly correlated with latrine proximity

Source	Country	Number of Latrines in Study ^b	Experimental Design	Subsurface Conditions	Sampling Timeframe ^c	Water Quality Parameters ^d	Conclusions
Nichols et al. 1983	U.S.A.	8	Installed test wells	3 latrines on clayey soil; 3 on shallow loam; 2 on sand; all soils well-drained	June and August, 1975-1979	Nitrate, Phosphorus, Fecal coliforms	Latrines with peat liners reduced movement of phosphorus and fecal coliforms but not nitrate.
Lewis et al. 1980	Botswana	30 pit latrines in the study area	Sampled existing wells and test wells	Clayey soils and fissured rock	October, 1977 – February 1978	Broad set of hydrochemical analyses, <i>E. coli</i> , Chloride solution used as tracer	Contamination of wells near latrine with <i>E. coli</i> and nitrate. Rapid transport of chloride tracer.
Baars 1957	Netherlands	Not specified	Sampled soil and existing wells	Unsaturated sandy soils	September 1951 and January and March 1952	Ammonia, <i>E. coli</i> , Nitrate	Contamination in soil samples limited to <1.5m from latrines
Dyer 1941	India	1	Installed test wells	Saturated and unsaturated alkaline alluvium soils	December – September	Chloride, Nitrate, Total coliforms	Movement of total coliforms limited to <7m from pit
Caldwell 1938a	U.S.A.	3	Installed test wells	Fine gravel to clayey soils	May – November 1933	<i>B. aerogenes</i> , anaerobes, Odor, pH, <i>B. coli</i>	<i>B. coli</i> movement limited to 3m from pits
Caldwell 1938b	U.S.A.	1	Installed test wells	Fine gravel to clayey soils	November 1932 – November 1933	Nitrate, Dissolved Oxygen, Chloride, Nitrite, pH, Odor, Colon aerogenes group, <i>B. coli</i> , Anaerobes	Limited movement of <i>B. coli</i> to 3m from pit and chemicals 24m
Caldwell and Parr 1937	U.S.A.	8 bored hole latrines	Installed test wells	Partially saturated fine gravel to clayey soils	May 1932 – May 1933	Nitrate, Dissolved Oxygen, Chloride, Nitrite, pH, Odor, Colon aerogenes group, <i>B. coli</i> , Anaerobes	Movement of bacteria and chemicals to within 10m and 26m of latrine, respectively
Caldwell 1937b	U.S.A.	1 envelope pit latrine	Installed test wells	Unsaturated fine gravel to clayey soils	May – November 1933	Colon aerogenes group, pH, Odor, <i>B. coli</i> , Anaerobes	Bacteria greatly reduced to within 2m from pit
Caldwell 1937a	U.S.A.	1	Installed test wells	Saturated fine gravel to clayey soils	August 1932 – November 1933	Colon aerogenes group, pH, Odor, <i>B. coli</i> , Anaerobes	Movement of bacteria to within 25m of latrine
Kligler 1921	U.S.A.	50	Sampled soil at varying distances	Saturated and unsaturated sand, sandy-clay and clay	Wet and dry seasons, 1918 – 1919	<i>B. coli</i> , <i>B. aerogenes</i>	Bacterial movement limited to <5.5m from pit

^aOnly studies that either directly assessed the transport of contaminants from pit latrines or studies that applied statistical methods to estimate a measure of risk associated with the presence of pit latrines are included.

^bNo specific data were provided on the density or number of pit latrines in the study area.

^cNo months or seasons were provided.

^dCulture-based assays were used for all microbiological tests, except for Verheyen et al. 2009, who used genotyping methods.

FIGURE LEGENDS

Figure 1. Percentage of low-income country populations using pit latrines as a primary sanitation facility (top map) and groundwater as a primary drinking water source (bottom map).

Figure 2. Lateral travel distances of different contaminants emanating from pit latrines. Studies which used test wells to measure distances are depicted by bars with black borders; studies which use existing wells to approximate distances are depicted by bars without black borders. Dashed horizontal lines indicate select guidelines for siting latrines with respect to distance from groundwater wells (Lewis et al. 1982; Franceys et al. 1992; WaterAid 2008; Sphere Project 2011).


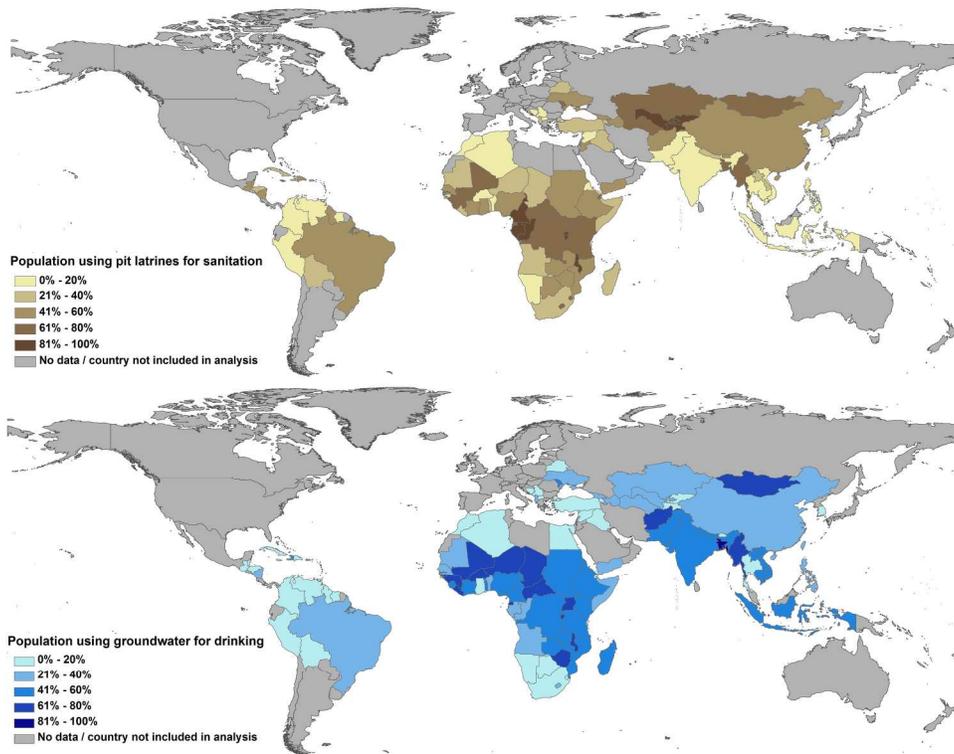


Figure 1
215x166mm (300 x 300 DPI)

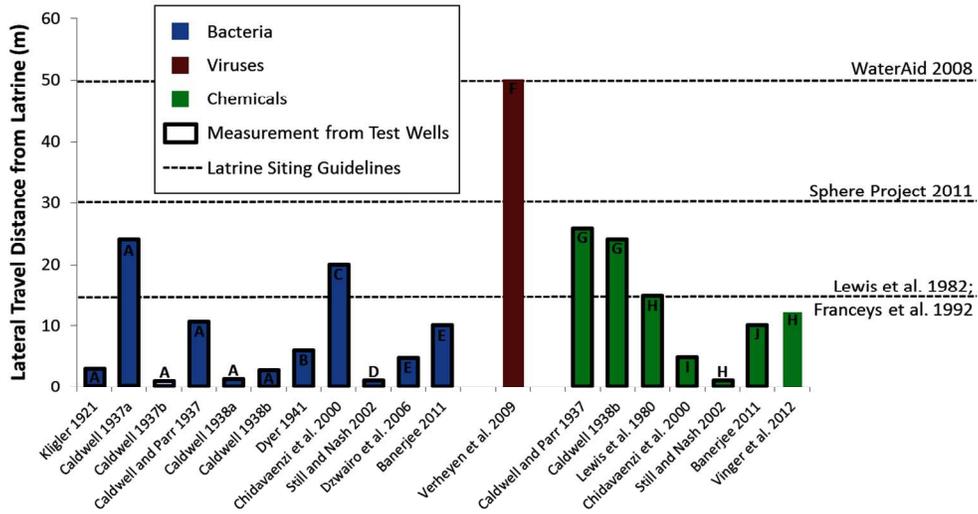

^AB. coli; ^BTotal coliforms; ^CColiforms; ^DFecal coliforms; ^ETotal and fecal coliforms; ^FAdenovirus and rotavirus; ^GChemical stream (nitrate, nitrite, and chloride); ^HNitrate; ^INitrogen; ^JSalt tracer

Figure 2
248x144mm (150 x 150 DPI)